

# **MODES OF A DOUBLE-BAFFLED, CYLINDRICAL, COAXIAL WAVEGUIDE**

**Clifton C. Courtney and Donald E. Voss**

**Voss Scientific  
418 Washington St SE  
Albuquerque, NM 87108**

**August 2003**

**Interim Report**

**APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.**



**AIR FORCE RESEARCH LABORATORY  
Directed Energy Directorate  
3550 Aberdeen Ave SE  
AIR FORCE MATERIEL COMMAND  
KIRTLAND AIR FORCE BASE, NM 87117-5776**

---

STINFO COPY

AFRL-DE-TR-2003-1139

Using Government drawings, specifications, or other data included in this document for any purpose other than Government procurement does not in any way obligate the U.S. Government. The fact that the Government formulated or supplied the drawings, specifications, or other data, does not license the holder or any other person or corporation; or convey any rights or permission to manufacture, use, or sell any patented invention that may relate to them.

This report has been reviewed by the Public Affairs Office and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nationals.

If you change your address, wish to be removed from this mailing list, or your organization no longer employs the addressee, please notify AFRL/DEHE, 3550 Aberdeen Ave SE, Kirtland AFB, NM 87117-5776.

Do not return copies of this report unless contractual obligations or notice on a specific document requires its return.

This report has been approved for publication.

//signed//

ANDREW D. GREENWOOD  
Project Manager

//signed//

REBECCA N. SEEGER, Col, USAF  
Chief, High Power Microwave Division

//signed//

L. BRUCE SIMPSON, SES  
Director, Directed Energy Directorate

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 18-08-2003		2. REPORT TYPE Interim		3. DATES COVERED (From - To) 09-07-2003 to 31-07-2003	
4. TITLE AND SUBTITLE Modes of a Double-Baffled, Cylindrical, Coaxial Waveguide				5a. CONTRACT NUMBER F29601-03-M-0101	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 65502F	
6. AUTHOR(S) Clifton C. Courtney and Donald E. Voss				5d. PROJECT NUMBER 3005	
				5e. TASK NUMBER DP	
				5f. WORK UNIT NUMBER CE	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  Voss Scientific 418 Washington St SE Albuquerque, NM 87108				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) AFRL/DEHE 3550 Aberdeen Ave SE Kirtland AFB, NM 87117-5776				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-DE-TR-2003-1139	
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT There is considerable interest in antenna and transmission line structures that are conformal to curved and cylindrical surfaces. The double-baffled, coaxial transmission line is defined by inner and outer radii, and an arc length. It is conformal to curved surfaces, particularly structures cylindrical in nature. In this note we derive the TE and TM, axially propagating modes of a double-baffled, coaxial transmission line. First, the characteristic equations that define the cutoff frequencies of each mode are derived, then the electric fields are explicitly expressed. Finally, an example double-baffled, coaxial transmission line geometry is defined for which the lowest TE and TM mode cutoff frequencies are computed and graphs of the normalized field components are presented.					
15. SUBJECT TERMS Electromagnetics; waveguide modes					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT  Unlimited	18. NUMBER OF PAGES  28	19a. NAME OF RESPONSIBLE PERSON Andrew Greenwood
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			19b. TELEPHONE NUMBER (include area code) 505-846-6642



## Contents

1.	<a href="#">Introduction</a> .....	1
2.	<a href="#">Geometry</a> .....	1
3.	<a href="#">Wave Equation</a> .....	1
4.	<a href="#">Boundary Conditions</a> .....	3
5.	<a href="#">Solution of the Separated Wave Equation</a> .....	3
6.	<a href="#">TE<sub>z</sub> and TM<sub>z</sub> Field Components</a> .....	3
6.1	<a href="#">TM<sub>z</sub> Field Components</a> .....	3
6.2	<a href="#">TE<sub>z</sub> Field Components</a> .....	4
7.	<a href="#">Solution of the Separated Wave Equation Subject to the Boundary Conditions of the Generalized Geometry</a> .....	4
7.1	<a href="#">TM<sub>z</sub> Field Components</a> .....	5
7.2	<a href="#">TE<sub>z</sub> Field Component</a> .....	7
8.	<a href="#">Example</a> .....	9
9.	<a href="#">Conclusion</a> .....	14

## List of Figures

Figure 1.	<a href="#">The geometry of the double-baffled cylindrical coaxial waveguide.</a>	2
Figure 2.	<a href="#">Plots of the Characteristic Equation for the double-baffled, coaxial waveguide transmission line (<math>n = 1</math>).</a>	11
Figure 3.	<a href="#">Normalized distributions of the electric field components of the <math>TE_{11}</math> mode of the double-baffled coaxial waveguide</a>	12
Figure 4.	<a href="#">Normalized distributions of the magnetic field components of the <math>TE_{11}</math> mode of the double-baffled coaxial waveguide</a>	13
Figure 5.	<a href="#">Vector plot of the current density of the <math>TE_{11}</math> mode</a>	13
Figure 6.	<a href="#">Normalized distributions of the electric field components of the <math>TM_{11}</math> mode of the double-baffled coaxial waveguide</a>	14
Figure 7.	<a href="#">Normalized distributions of electric field components of <math>TM_{11}</math> mode of double-baffled coaxial waveguide.</a>	15
Figure 8.	<a href="#">Normalized distributions of electric field components of <math>TE_{11}</math> mode of double-baffled coaxial waveguide.</a>	16
Figure 9.	<a href="#">Normalized distributions of the electric field components of the <math>TE_{21}</math> mode of the double-baffled coaxial waveguide.</a>	17

## List of Tables

<a href="#">Table 1.</a>	<a href="#">Cutoff frequencies of the TE modes of a double-baffled, coaxial waveguide.</a>	.....9
<a href="#">Table 2.</a>	<a href="#">Cutoff frequencies of the TM modes of a double-baffled, coaxial waveguide.</a>	.....9





## 1. Introduction

The double-baffled, coaxial transmission line is defined by inner and outer radii, and an arc length, and can be conformal to curved surfaces and cylindrical structures. This note describes the propagating modes of a coaxial waveguide transmission line with two baffles, with propagation assumed in the  $z$ -direction. First, the characteristic equations that define the cut off frequencies of each mode are derived, then the electric fields are explicitly expressed. Finally, an example geometry is defined for which the lowest TE and TM mode cutoff frequencies are computed and graphs of the normalized field components are presented.

## 2. Geometry

The geometry of the double-baffled, coaxial waveguide transmission line is shown in Figure 1. Note that the arc between the baffles has an angular extension of  $\mathbf{j} = \mathbf{j}_0$ .

## 3. Wave Equation

The natural coordinate system for the coaxial waveguide transmission line with two baffles is the cylindrical coordinate system. The scalar Helmholtz wave equation in cylindrical coordinates is

$$\frac{1}{r} \frac{\partial}{\partial r} \left( r \frac{\partial \mathbf{y}(\mathbf{r}, \mathbf{j}, z)}{\partial r} \right) + \frac{1}{r^2} \frac{\partial^2 \mathbf{y}(\mathbf{r}, \mathbf{j}, z)}{\partial \mathbf{j}^2} + \frac{\partial^2 \mathbf{y}(\mathbf{r}, \mathbf{j}, z)}{\partial z^2} + k^2 \mathbf{y}(\mathbf{r}, \mathbf{j}, z) = 0 \quad (1)$$


Using standard separation of variable techniques the wave equation can be written as

$$r \frac{d}{dr} \left( r \frac{dR(r)}{dr} \right) + \left[ (k_r r)^2 - n^2 \right] R(r) = 0 \quad (2a)$$

$$\frac{d^2}{d\mathbf{j}^2} \Phi(\mathbf{j}) + n^2 \Phi(\mathbf{j}) = 0 \quad (2b)$$

$$\frac{d^2}{dz^2} Z(z) + k_z^2 Z(z) = 0 \quad (2c)$$

where:  $\mathbf{y}(\mathbf{r}, \mathbf{j}, z) = R(r) \Phi(\mathbf{j}) Z(z)$ , and  $k_r^2 + k_z^2 = k^2$ .

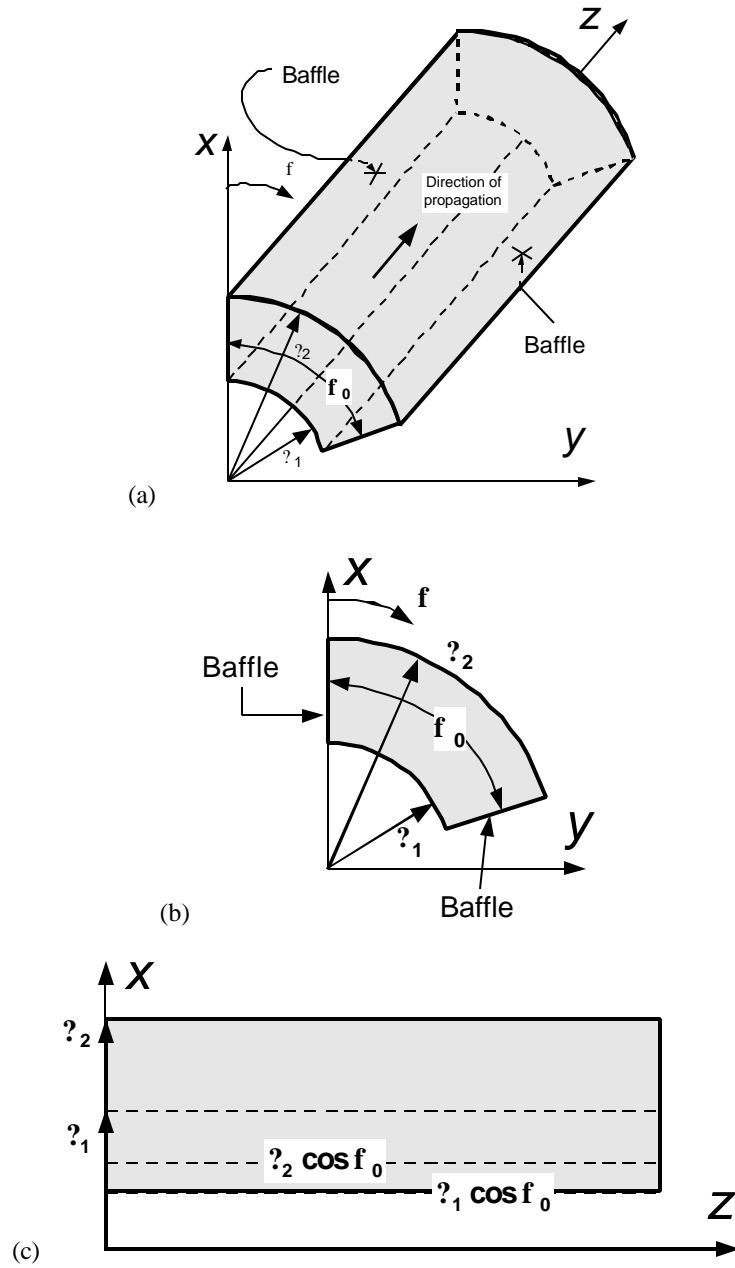

**Figure 1.** The geometry of the double-baffled cylindrical coaxial waveguide: (a) 3-D perspective drawing; (b) plane view o the  $xy$ -plane; and (c) plane view of the  $xz$ -plane.

## 4. Boundary Conditions

The boundary conditions for the coaxial waveguide transmission line with two baffles are:

$$E_r = 0 \text{ for } j = 0, \text{ and } j = j_0 \quad (3a)$$

$$E_j = 0 \text{ for } r = r_1, \text{ and } r = r_2 \quad (3b)$$

$$E_z = 0 \text{ for } r = r_1, \text{ and } r = r_2, \text{ and } j = 0, \text{ and } j = j_0. \quad (3c)$$

## 5. Solution of the Separated Wave Equation

The  $\Phi(j)$  and  $Z(z)$  equations are harmonic equations with harmonic functions as solutions; these will be denoted  $h(nj)$  and  $h(k_z z)$ .

The equation in  $R(r)$  is a Bessel equation, and has Bessel function solutions:

$J_n(k_r r)$  = the Bessel function of the first kind of order  $n$

$N_n(k_r r)$  = the Bessel function of the second kind of order  $n$

$H_n^{(1)}(k_r r)$  = the Hankel function of the first kind of order  $n$

$H_n^{(2)}(k_r r)$  = the Hankel function of the second kind of order  $n$

Let the function  $B_n(k_r r)$  represent the linearly independent combination of two of the above.

Then, the general solution to the scalar Helmholtz wave equation is:

$$Y_{k_r, n, k_z} = B_n(k_r r) h(nj) h(k_z z) \quad (4)$$

## 6. TE<sub>z</sub> and TM<sub>z</sub> Field Components

The electric and magnetic field components can be written in terms of fields that are TE<sub>z</sub> and TM<sub>z</sub>.

### 6.1 TM<sub>z</sub> Field Components

The TM<sub>z</sub> field components are found by letting  $\mathbf{A} = \mathbf{u}_z Y$ , where  $\mathbf{A}$  = the magnetic vector potential, and  $\mathbf{u}_z$  = unit vector in the z-direction. Then

$$\mathbf{E} = -j\omega\mathbf{A} + \frac{1}{\omega\epsilon} \nabla(\nabla \cdot \mathbf{A}), \quad (5a)$$

$$\text{and } \mathbf{H} = \frac{1}{m} \nabla \times \mathbf{A}. \quad (5b)$$

When expanded in cylindrical coordinates these equations become:

$$E_r = \frac{1}{j\omega\epsilon} \frac{\partial^2 \mathbf{y}}{\partial r \partial z} \quad (6a) \quad H_r = \frac{1}{m} \frac{1}{r} \frac{\partial \mathbf{y}}{\partial j} \quad (6d)$$

$$E_j = \frac{1}{j\omega\epsilon} \frac{1}{r} \frac{\partial^2 \mathbf{y}}{\partial j \partial z} \quad (6b) \quad H_j = -\frac{1}{m} \frac{\partial \mathbf{y}}{\partial r} \quad (6e)$$

$$E_z = \frac{1}{j\omega\epsilon} \left( \frac{\partial^2}{\partial z^2} + k^2 \right) \mathbf{y} \quad (6c) \quad H_z = 0 \quad (6f)$$

## 6.2 TE<sub>z</sub> Field Components

The TE<sub>z</sub> field components are found by letting  $\mathbf{F} = \mathbf{u}_z \mathbf{y}$ , where  $\mathbf{F}$  = the electric vector potential, and  $\mathbf{u}_z$  = unit vector in the z-direction. Then

$$\mathbf{E} = -\frac{1}{\epsilon} \nabla \times \mathbf{F}, \quad (7a)$$

$$\mathbf{H} = -j\omega\mathbf{F} + \frac{1}{j\omega\epsilon} \nabla (\nabla \cdot \mathbf{F}). \quad (7b)$$

When expanded in cylindrical coordinates these TE<sub>z</sub> field equations become:

$$E_r = -\frac{1}{\epsilon} \frac{1}{r} \frac{\partial \mathbf{y}}{\partial j} \quad (8a) \quad H_r = \frac{1}{j\omega\epsilon} \frac{\partial^2 \mathbf{y}}{\partial r \partial z} \quad (8d)$$

$$E_j = \frac{1}{\epsilon} \frac{\partial \mathbf{y}}{\partial r} \quad (8b) \quad H_j = \frac{1}{j\omega\epsilon} \frac{1}{r} \frac{\partial^2 \mathbf{y}}{\partial j \partial z} \quad (8e)$$

$$E_z = 0 \quad (8c) \quad H_z = \frac{1}{j\omega\epsilon} \left( \frac{\partial^2}{\partial z^2} + k^2 \right) \mathbf{y} \quad (8f)$$

## 7. Solution of the Separated Wave Equation Subject to the Boundary Conditions of the Generalized Geometry

Propagating waves in the z-direction in the double-baffled coaxial waveguide give rise to

$$h(k_z z) = e^{-j k_z z} \quad (9)$$

The harmonic function  $h(nj)$  can be written as

$$h(nj) = a_n \sin(nj) + b_n \cos(nj) \quad (10)$$

Note that  $n$  is not necessarily an integer. The scalar wave function is then

$$\mathcal{Y}_{k_r, n, k_z} = B_n(k_r \mathbf{r}) h(n\mathbf{j}) e^{-j k_z z} \quad (11)$$

subject to the boundary conditions. The solutions for the TE<sub>z</sub> and TM<sub>z</sub> modes in the guide are as follows.

### 7.1 TM<sub>z</sub> Field Components

The TM<sub>z</sub> electric field components in terms of the wave function are

$$E_r = \frac{(-jk_z)(k_r)}{j\omega\epsilon} B'_n(k_r \mathbf{r}) h(n\mathbf{j}) e^{-j k_z z} \quad (12a)$$

$$E_j = \frac{(-jk_z)(n)}{j\omega\epsilon} \frac{1}{r} B_n(k_r \mathbf{r}) h'(n\mathbf{j}) e^{-j k_z z} \quad (12b)$$

$$E_z = \frac{1}{j\omega\epsilon} (k^2 - k_z^2) B_n(k_r \mathbf{r}) h(n\mathbf{j}) e^{-j k_z z} \quad (12c)$$

Since

$$E_z = 0 \text{ for } \mathbf{r} = \mathbf{r}_1, \text{ and } \mathbf{r} = \mathbf{r}_2, \text{ and } \mathbf{j} = 0, \text{ and } \mathbf{j} = \mathbf{j}_0;$$

then

$$h(n\mathbf{j})|_{\mathbf{j}=0, \mathbf{j}_0} = (a_n \sin(n\mathbf{j}) + b_n \cos(n\mathbf{j}))|_{\mathbf{j}=0, \mathbf{j}_0} = 0$$

is satisfied if

$$a_n = 1, b_n = 0, n = \frac{m\pi}{j_0}, \text{ and } m = 1, 2, 3, K. \quad (13)$$

Note that

$$B'_n(k_r \mathbf{r}) = \frac{d}{d(k_r \mathbf{r})} B_n(k_r \mathbf{r}).$$

The general Bessel function,  $B_n(k_r \mathbf{r})$ , also satisfies the boundary conditions if

$$B_n(k_r \mathbf{r})|_{\mathbf{r}=\mathbf{r}_1, \mathbf{r}_2} = 0$$

Let

$$B_n(k_r \mathbf{r}) = a_n J_n(k_r \mathbf{r}) + b_n N_n(k_r \mathbf{r}).$$

Then

$$a_n J_n(k_r \mathbf{r}) + b_n N_n(k_r \mathbf{r})|_{\mathbf{r}=\mathbf{r}_1, \mathbf{r}_2} = 0$$

$$a_n J_n(k_r \mathbf{r}_1) + b_n N_n(k_r \mathbf{r}_1) = 0$$

$$a_n J_n(k_r \mathbf{r}_2) + b_n N_n(k_r \mathbf{r}_2) = 0$$

Solving the first equation for  $a_n$  gives

$$a_n = b_n \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} \quad (14)$$

Substitution into the second equation yields:

$$a_n J_n(k_r \mathbf{r}_2) + b_n N_n(k_r \mathbf{r}_2) = -b_n \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}_2) + a_n N_n(k_r \mathbf{r}_2) = 0,$$

and rearranging terms gives

$$b_n \left( N_n(k_r \mathbf{r}_2) - \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}_2) \right) = 0$$

For specific values of  $n$ ,  $\mathbf{r}_1$  and  $\mathbf{r}_2$ , the values of  $k_r$  that solve

$$\frac{N_n(k_r \mathbf{r}_2)}{J_n(k_r \mathbf{r}_2)} = \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} \quad (15)$$

are the sought after mode numbers that are true for any non-zero value of  $b_n$ . Hence,

$$b_n = 1 \text{ and } a_n = -\frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)}.$$

Finally, the scalar wave function for the  $\text{TM}_z$  modes is:

$$\mathcal{Y}_{k_r, n, k_z} = \left[ N_n(k_r \mathbf{r}) - \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}) \right] \sin(n\mathbf{j}) e^{-j k_z z} \text{ for } n = \frac{m\mathbf{p}}{\mathbf{j}_0}, \quad m = 1, 2, 3, \mathbf{K}, \text{ and } k_r^2 + k_z^2 = k^2.$$

The convention for the zeros of the Characteristic Equation is  $p = p_1, p_2, p_3, \mathbf{K}$ , where the  $p_1$  is the first zero solution,  $p_2$  is the second solution (with increasing numerical value, and so forth).

The  $\text{TM}_z$  field components are then found explicitly as:

$$E_r = \frac{-k_r k_z}{\omega \mathbf{m} \mathbf{e}} \sin(n\mathbf{j}) \left[ N'_n(k_r \mathbf{r}) - \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} J'_n(k_r \mathbf{r}) \right] e^{-j k_z z} \quad (16a)$$

$$E_j = -\frac{k_z n}{\omega \mathbf{m} \mathbf{r}} \left[ N_n(k_r \mathbf{r}) - \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}) \right] \cos(n\mathbf{j}) e^{-j k_z z} \quad (16b)$$

$$E_z = \frac{k^2 - k_z^2}{j \omega \mathbf{m} \mathbf{e}} \left[ N_n(k_r \mathbf{r}) - \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}) \right] \sin(n\mathbf{j}) e^{-j k_z z} \quad (16c)$$

$$H_r = \frac{1}{\mathbf{m} \mathbf{r}} \left[ N_n(k_r \mathbf{r}) - \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}) \right] \cos(n\mathbf{j}) e^{-j k_z z} \quad (16d)$$

$$H_j = -\frac{k_r}{m} \left[ N'_n(k_r \mathbf{r}) - \frac{N_n(k_r \mathbf{r}_1)}{J_n(k_r \mathbf{r}_1)} J'_n(k_r \mathbf{r}) \right] \sin(n\mathbf{j}) e^{-j k_z z} \quad (16e)$$

$$H_z = 0 \quad (16f)$$

## 7.2 $TE_z$ Field Component

The  $TE_z$  electric field components in terms of the wave function are:

$$E_r = -\frac{1}{e} \frac{1}{r} B_n(k_r \mathbf{r}) \frac{d}{d\mathbf{j}} h(n\mathbf{j}) e^{-j k_z z} \quad (17a)$$

$$E_j = \frac{1}{e} \frac{d}{d\mathbf{r}} B_n(k_r \mathbf{r}) h(n\mathbf{j}) e^{-j k_z z} \quad (17b)$$

$$E_z = 0 \quad (17c)$$

Since

$$E_r = 0 \text{ for } \mathbf{j} = 0, \text{ and } \mathbf{j} = \mathbf{j}_0$$

$$E_j = 0 \text{ for } \mathbf{r} = \mathbf{r}_1, \text{ and } \mathbf{r} = \mathbf{r}_2$$

then

$$\begin{aligned} \frac{d}{d\mathbf{j}} h(n\mathbf{j})|_{\mathbf{j}=0, \mathbf{j}_0} &= \frac{d}{d\mathbf{j}} (a_n \sin(n\mathbf{j}) + b_n \cos(n\mathbf{j}))|_{\mathbf{j}=0, \mathbf{j}_0} \\ &= n(a_n \cos(n\mathbf{j}) - b_n \sin(n\mathbf{j}))|_{\mathbf{j}=0, \mathbf{j}_0} = 0 \end{aligned}$$

is satisfied if

$$a_n = 0, \quad b_n = 1, \quad n = \frac{m\mathbf{p}}{\mathbf{j}_0}, \text{ and } m = 1, 2, 3, K. \quad (18)$$

The general Bessel function,  $B_n(k_r \mathbf{r})$ , also satisfies the boundary conditions if

$$\frac{d}{d\mathbf{r}} B_n(k_r \mathbf{r})|_{\mathbf{r}=\mathbf{r}_1, \mathbf{r}_2} = 0$$

Let

$$B_n(k_r \mathbf{r}) = a_n J_n(k_r \mathbf{r}) + b_n N_n(k_r \mathbf{r}),$$

then

$$\frac{d}{d\mathbf{r}} \{a_n J_n(k_r \mathbf{r}) + b_n N_n(k_r \mathbf{r})\}|_{\mathbf{r}=\mathbf{r}_1, \mathbf{r}_2} = 0$$

$$a_n J'_n(k_r \mathbf{r}_1) + b_n N'_n(k_r \mathbf{r}_1) = 0$$

$$a_n J'_n(k_r \mathbf{r}_2) + b_n N'_n(k_r \mathbf{r}_2) = 0.$$

Solving the first equation for  $a_n$  gives

$$a_n = -b_n \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)}. \quad (19)$$

Substitution into the second equation yields:

$$a_n J'_n(k_r \mathbf{r}_2) + b_n N'_n(k_r \mathbf{r}_2) = -b_n \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)} J'_n(k_r \mathbf{r}_2) + b_n N'_n(k_r \mathbf{r}_2) = 0.$$

Rearranging terms gives

$$b_n \left( N'_n(k_r \mathbf{r}_2) - \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)} J'_n(k_r \mathbf{r}_2) \right) = 0$$

For specific values of  $n$ ,  $\mathbf{r}_1$  and  $\mathbf{r}_2$ , the values of  $k_r$  that solve

$$\frac{N'_n(k_r \mathbf{r}_2)}{J'_n(k_r \mathbf{r}_2)} = \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)} \quad (20)$$

are the sought after mode numbers that are true for any non-zero value of  $b_n$ . Hence,

$$b_n = 1 \text{ and } a_n = -\frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)}.$$

Finally, the scalar wave function for the TE<sub>z</sub> modes is:

$$\mathcal{Y}_{k_r, n, k_z} = \left[ N_n(k_r \mathbf{r}) - \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}) \right] \cos(n\mathbf{j}) e^{-j k_z z} \text{ for } n = \frac{m\mathbf{p}}{\mathbf{j}_0}, m = 1, 2, 3, \mathbf{K} \text{ and } k_r^2 + k_z^2 = k^2.$$

Again, the convention for the zeros of the TE Characteristic Equation is  $p = p_1, p_2, p_3, \mathbf{K}$ , where the  $p_1$  is the first solution,  $p_2$  is the second solution (with increasing numerical value, and so forth. The TE<sub>z</sub> field components are then found explicitly as:

$$E_r = \frac{n}{\mathbf{e} \mathbf{r}} \left[ N_n(k_r \mathbf{r}) - \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}) \right] \sin(n\mathbf{j}) e^{-j k_z z} \quad (21a)$$

$$E_j = \frac{k_r}{\mathbf{e}} \left[ N'_n(k_r \mathbf{r}) - \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)} J'_n(k_r \mathbf{r}) \right] \cos(n\mathbf{j}) e^{-j k_z z} \quad (21b)$$

$$E_z = 0 \quad (21c)$$

$$H_r = \frac{-k_z k_r}{\mathbf{w} \mathbf{m} \mathbf{e}} \left[ N'_n(k_r \mathbf{r}) - \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)} J'_n(k_r \mathbf{r}) \right] \cos(n\mathbf{j}) e^{-j k_z z} \quad (21d)$$

$$H_j = \frac{k_z}{\mathbf{w} \mathbf{m} \mathbf{e}} \frac{n}{\mathbf{r}} \left[ N_n(k_r \mathbf{r}) - \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}) \right] \sin(n\mathbf{j}) e^{-j k_z z} \quad (21e)$$



$$H_z = \frac{k_r^2}{j\omega\mu} \left[ N_n(k_r \mathbf{r}) - \frac{N'_n(k_r \mathbf{r}_1)}{J'_n(k_r \mathbf{r}_1)} J_n(k_r \mathbf{r}) \right] \cos(nj) e^{-j k_z z} \quad (21f)$$

Note that the Characteristic Equations for the TE and TM mode are similar, but not exact, to the forms given in [Ref. 2]. The reason for the differences is at this time unknown.

## 8. Example

Determine the first few cutoff frequencies of the TE and TM modes of a Double-baffled, Cylindrical, Coaxial Waveguide defined by the parameters :  $\mathbf{r}_1 = 5in = 0.127 m$ ,  $\mathbf{r}_2 = 6in = 0.1524 m$  and  $j_0 = 2p/3$ .

The cutoff frequencies for the first few the TE and TM modes have been computed and are presented in **Table 1** and **Table 2** below.

**Table 1. Cutoff frequencies (GHz) of the TE modes of a double-baffled, coaxial waveguide (  $\mathbf{r}_1 = 5in = 0.127 m$ ,  $\mathbf{r}_2 = 6in = 0.1524 m$  and  $j_0 = 2p/3$  ).**


M / p	1	2	3
1	0.513006	5.93146	11.8179
2	1.02589	5.99859	11.8516
3	1.53851	6.10889	11.9074

**Table 2. Cutoff frequencies (GHz) of the TM modes of a double-baffled, coaxial waveguide (  $\mathbf{r}_1 = 5in = 0.127 m$ ,  $\mathbf{r}_2 = 6in = 0.1524 m$  and  $j_0 = 2p/3$  ).**

M / p	1	2	3
1	5.92129	11.8129	17.7111
2	5.98762	11.8464	17.7335
3	6.09656	11.9021	17.7707

The characteristic equations for the TE<sub>11</sub> and TM<sub>11</sub> cases are plotted in Figure 2a and c. The characteristic equation for the TE<sub>1p</sub> mode is plotted in Figure 2b showing the first 3 roots that characterize the first 3 modes. Note that the radial gap between the conductors is 1-inch, about ½ of the freespace wavelength of the 1<sup>st</sup> TM cutoff frequency. And the median arc length between

the inner and outer radii is 11.52 inches, about 1/2 of the freespace wavelength of the 1<sup>st</sup> TE cutoff frequency.

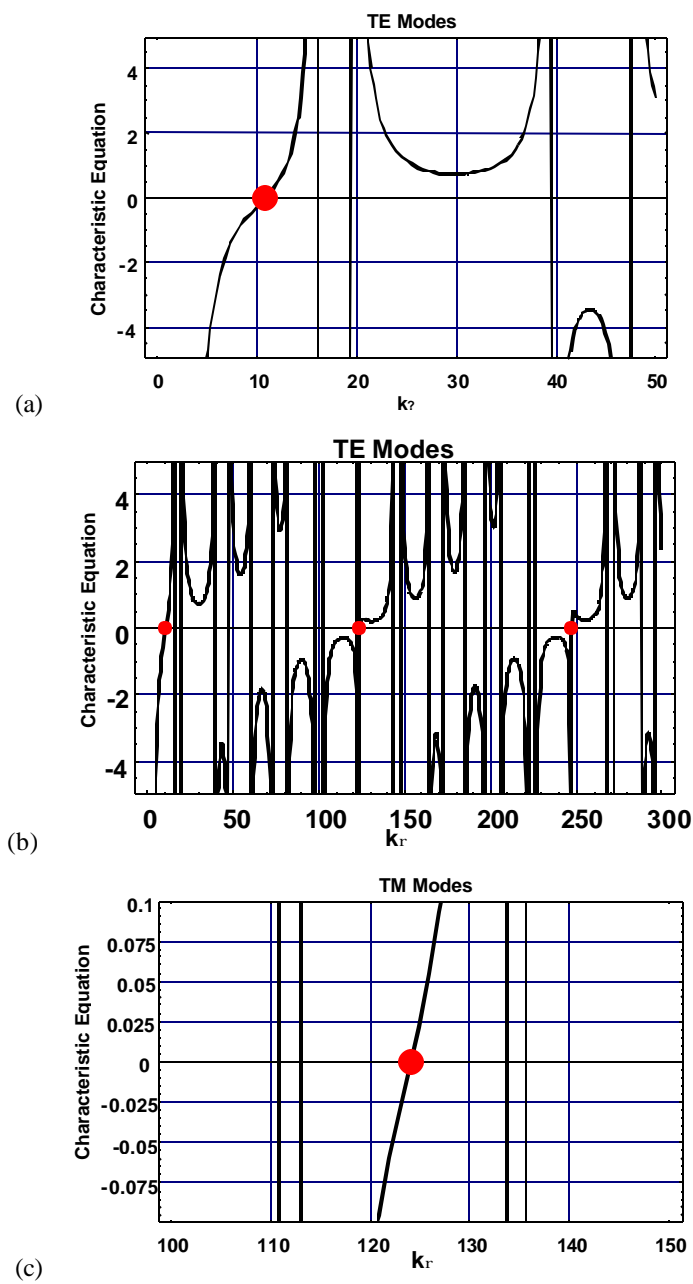

**Figure 2. Plots of the Characteristic Equation for the double-baffled, coaxial waveguide transmission line ( $n = 1$ ): (a)  $TE_{11}$  mode; (b)  $TE_{1p}$ , for  $p = 1, 2, 3$  modes; and (c)  $TM_{11}$  mode.**

Plot the electric field components over a cross section of the guide at a frequency that is 1.2 times the cutoff frequency of the lowest mode. For  $m = 1$ ,

$$n = \frac{mp}{j_0} = \frac{p}{2p/3} = 1.5.$$

For the  $TM_{11}$  mode,  $f_c = 5.921$  GHz. For  $m = 1$ ,

$$n = \frac{mp}{j_0} = \frac{p}{2p/3} = 1.5.$$

For the  $TE_{11}$  mode,  $f_c = 513.00$  MHz.

Then, compute the field distributions at  $f = 1.2 \times f_c = 1.2 \times 513.00 = 615.6$  MHz and

$f = 1.2 \times f_c = 1.2 \times 5.921 = 7.105$  GHz.

The wavelength at the operating frequency of the guide for the  $TE_{11}$  mode,  $f = 615.6$  MHz, in the axial direction of the guide,  $l_g$ , is defined as

$$l_g = \frac{2p}{k_z} = \frac{2p}{7.13159} = 0.881036 \text{ meters}$$

where  $k_z = \sqrt{k^2 - k_r^2}$ . The wavelength at the operating frequency of the guide for the  $TM_{11}$  mode,  $f = 7.105$  GHz, in the axial direction of the guide,  $l_g$ , is

$$l_g = \frac{2p}{k_z} = \frac{2p}{82.2978} = 0.076347 \text{ meters.}$$

Normalized distributions of the electric field components of the  $TE_{11}$  mode of the double-baffled coaxial waveguide for  $r_1 = 5 \text{ in} = 0.127 \text{ m}$ ,  $r_2 = 6 \text{ in} = 0.1524 \text{ m}$ ,  $j_0 = 2p/3$ , and  $f = 615.6$  MHz are shown in Figure 3. Normalized distributions of the magnetic field components are shown in Figure 4. Since  $\mathbf{J}_s = \hat{\mathbf{n}} \times \mathbf{H}$ , we can plot the current density on the interior surfaces of the waveguide. Shown in Figure 5 is a vector plot of the current density of the  $TE_{11}$  mode at  $f = 615.6$  MHz on the  $r = r_2$ ,  $0 < j < j_0 = 2p/3$  surface.

Normalized distributions of the electric field components of the  $TM_{11}$  mode of the double-baffled coaxial waveguide for  $r_1 = 5\text{ in} = 0.127\text{ m}$ ,  $r_2 = 6.0\text{ in} = 0.1524\text{ m}$ ,  $j_0 = 2p/3$ , and  $f = 7.105\text{ GHz}$  are shown in Figure 6.

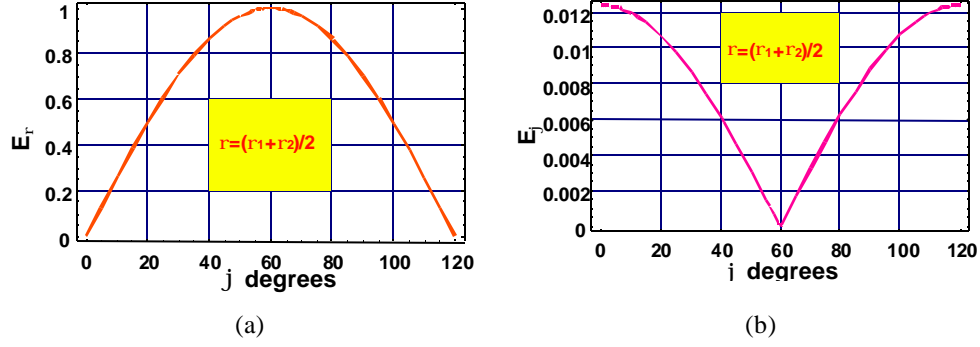


Figure 3. Normalized distributions of the electric field components of the  $TE_{11}$  mode of the double-baffled coaxial waveguide ( $r_1 = 5\text{ in} = 0.127\text{ m}$ ,  $r_2 = 6.0\text{ in} = 0.1524\text{ m}$ ,  $j_0 = 2p/3$ , and  $f = 615.6\text{ MHz}$ ): (a)  $E_r((r_1 + r_2)/2, j)$ ; and (b)  $E_j((r_1 + r_2)/2, j)$ .  $E_z = 0$ .

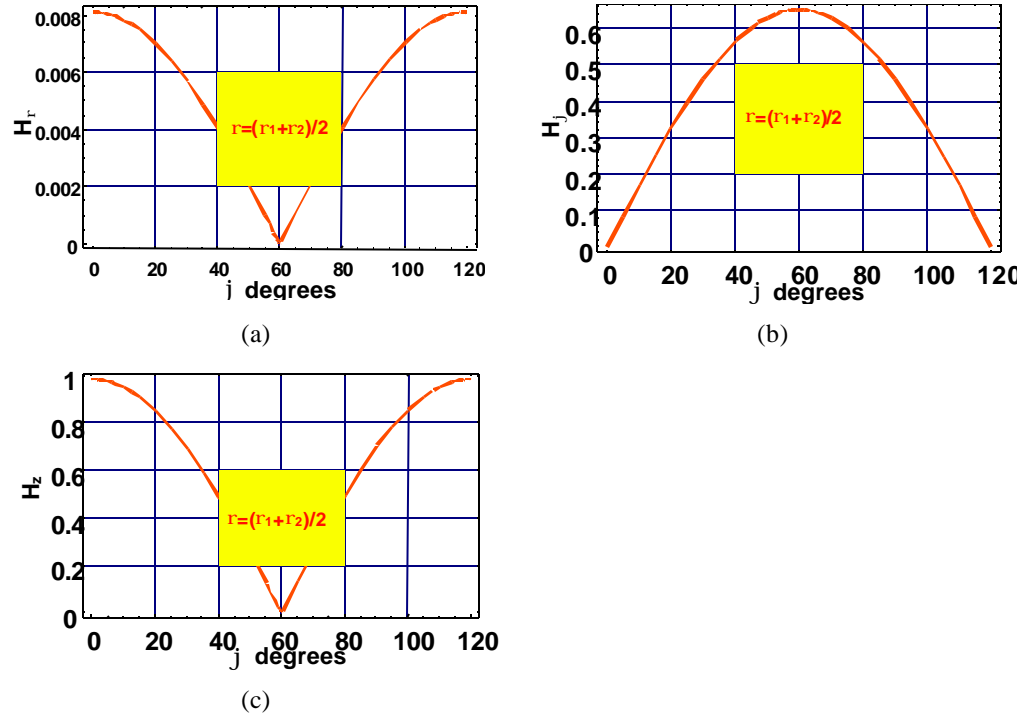


Figure 4. Normalized distributions of the magnetic field components of the  $TE_{11}$  mode of the double-baffled coaxial waveguide ( $r_1 = 5 \text{ in}$ ,  $r_2 = 6.0 \text{ in}$ ,  $j_0 = 2p/3$ , and  $f = 615.6 \text{ MHz}$ ): (a)  $H_r$ ; (b)  $H_j$ ; and (c)  $H_z$ .


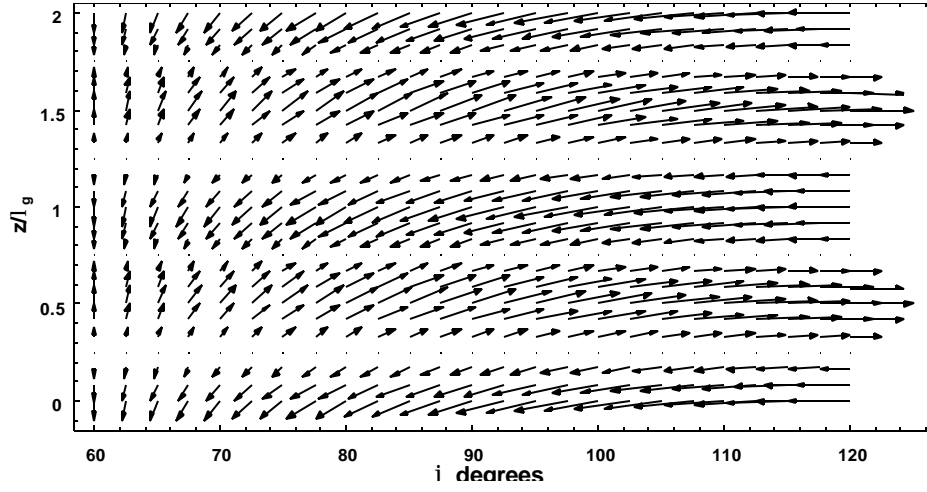


Figure 5. Vector plot of the current density of the  $TE_{11}$  mode at  $f = 615.6 \text{ MHz}$  on the  $r = r_2$ ,  $0 < j < j_0 = 2p/3$  surface.

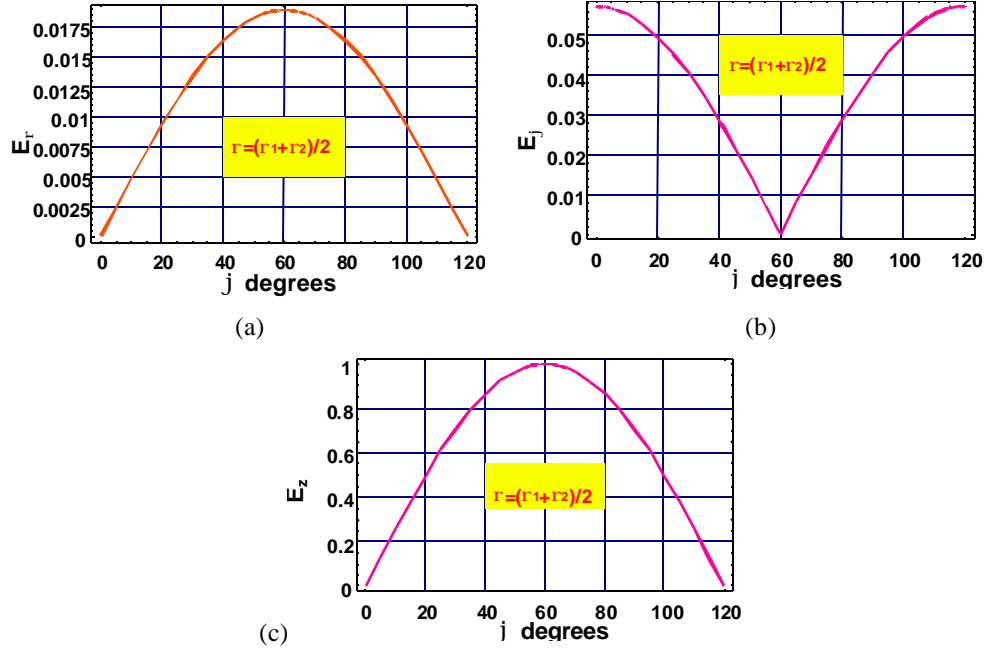


**Figure 6.** Normalized distributions of the electric field components of the  $TM_{11}$  mode of the double-baffled coaxial waveguide (  $r_1 = 5 \text{ in}$  ,  $r_2 = 6 \text{ in}$  ,  $j_0 = 2p/3$  , and  $f = 7.105 \text{ GHz}$ ): (a)  $E_r$  ; (b)  $E_j$  ; and (c)  $E_z$  .

Contour and 3D projection graphs of the normalized distributions of the electric field components of the  $TM_{11}$  modes of the double-baffled coaxial waveguide for  $r_1 = 5 \text{ in} = 0.127 \text{ m}$  ,  $r_2 = 6.0 \text{ in} = 0.1524 \text{ m}$  ,  $j_0 = 2p/3$  , and  $f = 7.105 \text{ GHz}$ ) are shown in Figure 7. Likewise, plots of the normalized distributions of the electric field components of the  $TE_{11}$  mode of the double-baffled coaxial waveguide are shown in Figure 8 for  $f = 615.6 \text{ MHz}$


Finally, the form of the next higher order mode is of interest. Referring to Table 1, the next propagating mode is the  $TE_{21}$  mode, with a cutoff frequency of  $f_c = 1.02589 \text{ GHz}$ . The non-zero electric fields at  $(r_1+r_2)/2$ , as a function of  $j$  are plotted in Figure 9.

## 9. Conclusion

This report derives expressions for waveguide modes and cutoff frequencies of the double-baffled, coaxial transmission line. Example computations are also shown. The derived expressions are useful for the design of antenna and transmission line structures that are conformal to curved and cylindrical surfaces.

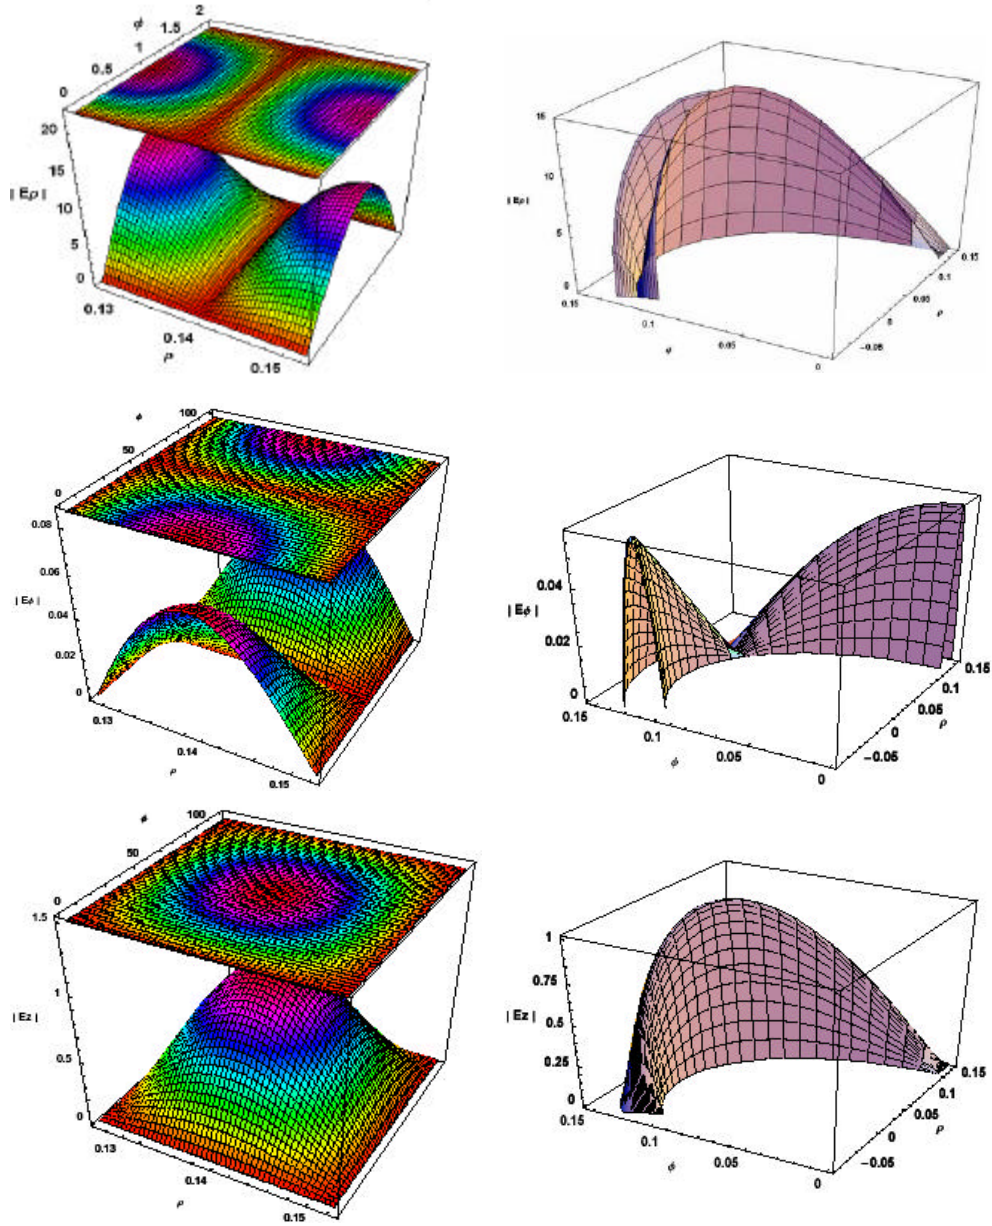


**Figure 7.** Normalized distributions of electric field components of  $TM_{11}$  mode of double-baffled coaxial waveguide (  $r_1 = 5 \text{ in} = 0.127 \text{ m}$ ,  $r_2 = 6.0 \text{ in} = 0.1524 \text{ m}$ ,  $j_0 = 2p/3$ , and  $f = 7.105 \text{ GHz}$ ): (a)  $E_r$ ; (b)  $E_\phi$ ; and (c)  $E_z$ .

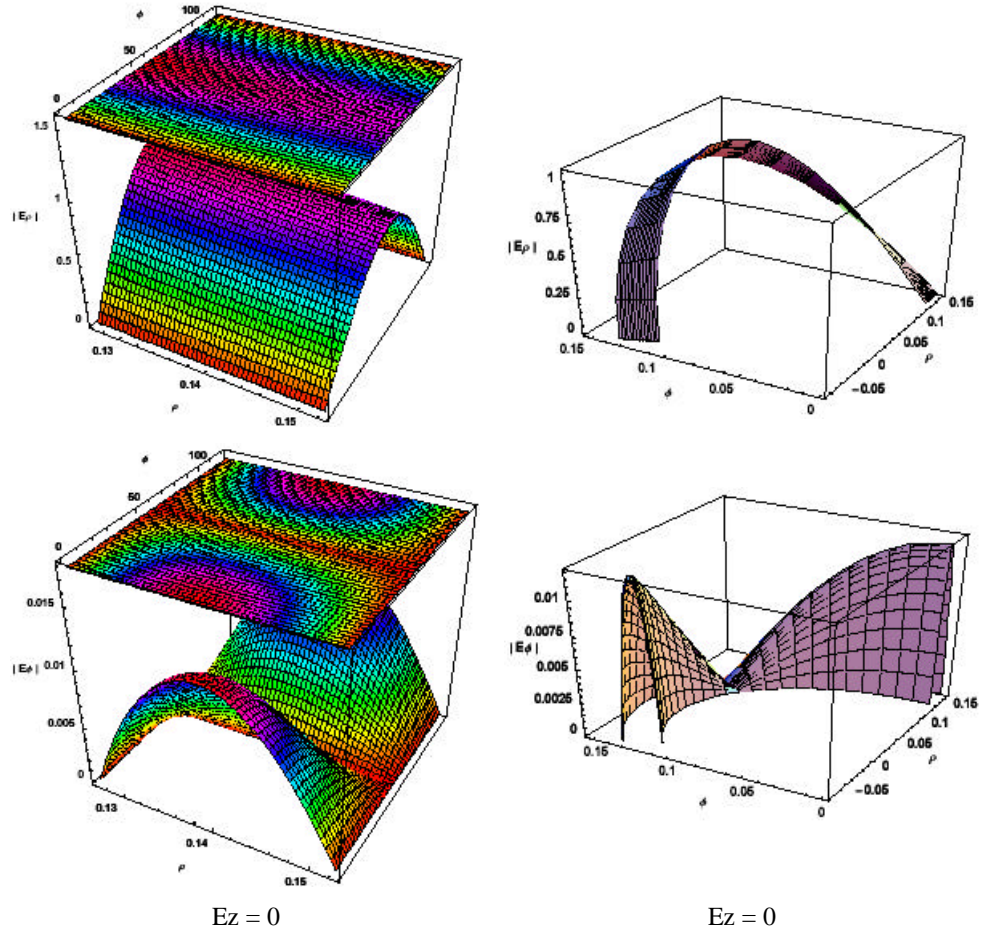

**Figure 8.** Normalized distributions of electric field components of  $TE_{11}$  mode of double-baffled coaxial waveguide ( $r_1 = 5 \text{ in} = 0.127 \text{ m}$ ,  $r_2 = 6.0 \text{ in} = 0.1524 \text{ m}$ ,  $j_0 = 2p/3$ , and  $f = 0.6156 \text{ GHz}$ ): (a)  $E_r$ ; (b)  $E_\phi$ ; and (c)  $E_z$ .



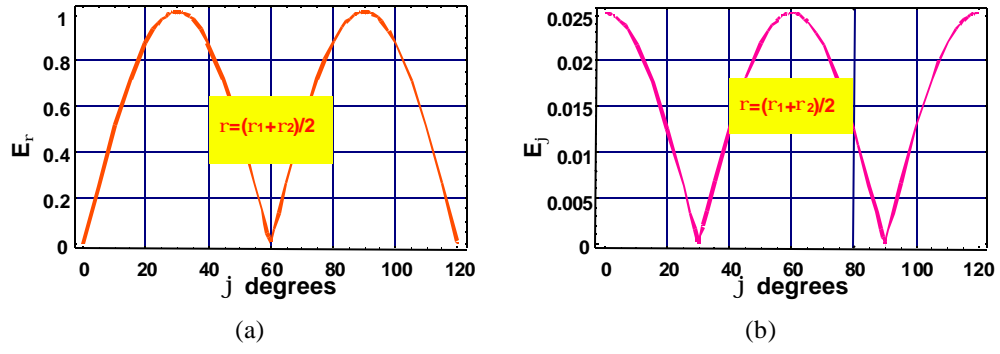

**Figure 9.** Normalized distributions of the electric field components of the  $TE_{21}$  mode of the double-baffled coaxial waveguide (  $r_1 = 5 \text{ in}$  ,  $r_2 = 6.0 \text{ in}$  ,  $j_0 = 2p/3$  , and  $f = 1.3 \text{ MHz}$ ): (a)  $E_r$  ; and (b)  $E_j$  .  $E_z = 0$  .

## References

1. Time Harmonic Electromagnetic Fields, R. Harrington, pg. 199, McGraw-Hill, NY, 1961.
2. Encyclopedia of Physics, ed. S. Flugge, pg. 345, Springer-Verlag, Berlin, 1958.

## DISTRIBUTION LIST

DTIC/OCP 8725 John J. Kingman Rd, Suite 0944 Ft Belvoir, VA 22060-6218	1 cy
AFRL/VSIL Kirtland AFB, NM 87117-5776	2 cys
AFRL/VSIH Kirtland AFB, NM 87117-5776	1 cy
AFRL/DEHP/Dr. Thomas Spencer Kirtland AFB, NM 97117-5776	1cy
Official Record Copy AFRL/DEHE/Dr. Andrew Greenwood	2 cys

